


EN Instruction for installation and utilization of **LUMAX** downlight luminaire

Lamp	Capacitor (µF)
70 W, HI	12.0
150 W, HI	18.0/20.0

 250-255 mm



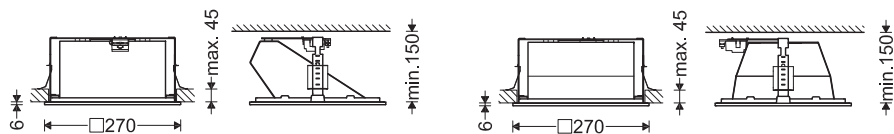

7002004912

www.megalite.com info@megalite.com



Input voltage depending on ballast type

CCG	230 V ± 10% 50 Hz	240 V ± 10% 50 Hz	
ECG	220 - 240 V ± 10% 50 / 60 Hz 		

Under side 



- 1- In choosing the correct HID lamps, it is highly recommended to consider the lamp manufacturer specified operating position.
- 2- Earth connection as provided is mandatory.
- 3- Make sure that cables do not contact luminaire housing.
- 4- The distance between luminaire and control gear must be more than 10 cm.
- 5- For proper utilization of this product and safety, it is mandatory to closely comply with the directions and notes in this instruction and guide.

