

* **HELIUS** L can be ordered, upon request, with customized Timer Dimming scenarios. The above table can be completed in order to keep records of the customized settings. For more information, contact Megalite sales department.

Timer dimming setting

	First step	Second step	Third step	Fourth step	Fifth step	Sixth step	Seventh step
Duration							
Dimming Value							
Dimming mode	Traditional Timer Dimming Self-Adapt-Precentage Timer Self-Adapt-Midnight Timer						



Instruction for Installation and Utilization of **HELIUS L**


7002017512


www.megalite.com info@megalite.com

 $Cx. S = 0.074 m^2$

Ø48 mm

G314PJ45







Cat. No.	W (kg)
M314L	12.3



1- For proper utilization of this product and safety, it is mandatory to closely comply with the directions and notes in this instruction and guide.


G314PJ45

Ø48 mm


- 2- Earth connection as provided is mandatory.
- 3- Do not directly touch or impact LED module.4- Do not stare at LED light source.
- 5- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. Always switch off the power prior to installa-tion, maintenance or repair activities.




No. Minutes: CM-94-452 Doc. No.W-CM011/01 Execution Date: 05/09/2015 Tracking Code: RO-097

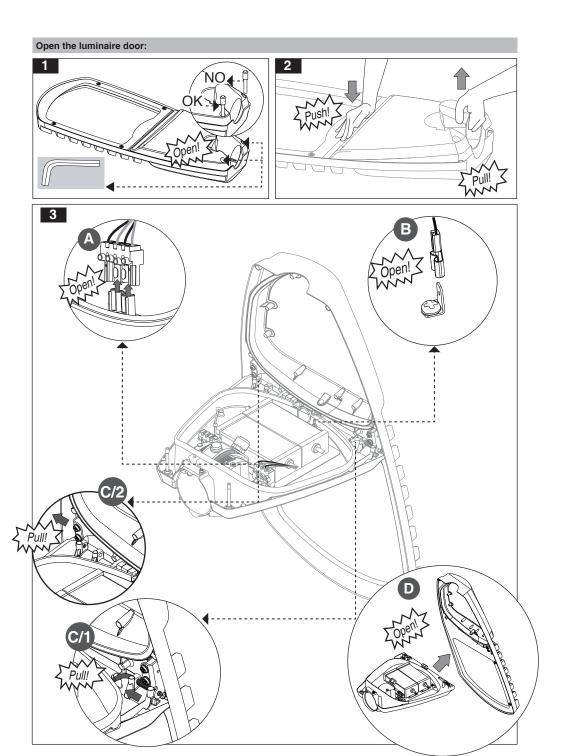


Horizontal pole mounting:






M Bubble level feature to precisely align luminaire with horizontal plane

Vertical pole mounting:

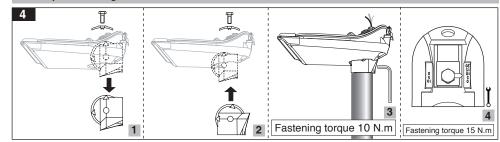

Electrical connections:

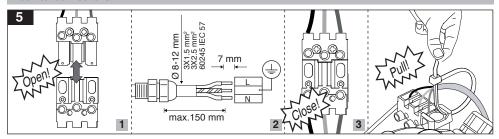

Close the luminaire door:

