



Cat. Code	Dimintions	Max Temp.	Min Temp.	W
	L(mm)	(C.)	(C.)	(kg)
M455...601LED1840-S	600	45°	-20°	1.8
M455...1152LED2840-S	1160	45°	-20°	3.2
M455...1453LED3840-S	1440	45°	-20°	4.2




- 1- For proper utilization of this product and safety, it is mandatory to closely comply with the directions and notes in this instruction and guide.
- 2- Earth connection as provided is mandatory.
- 3- Do not directly touch or impact LED module.
- 4- Do not stare at LED light source.
- 5- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced

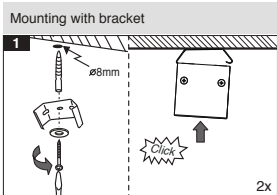


Mounting with bracket

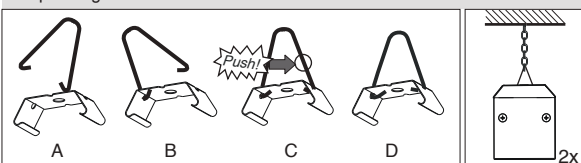

G440CKSU...

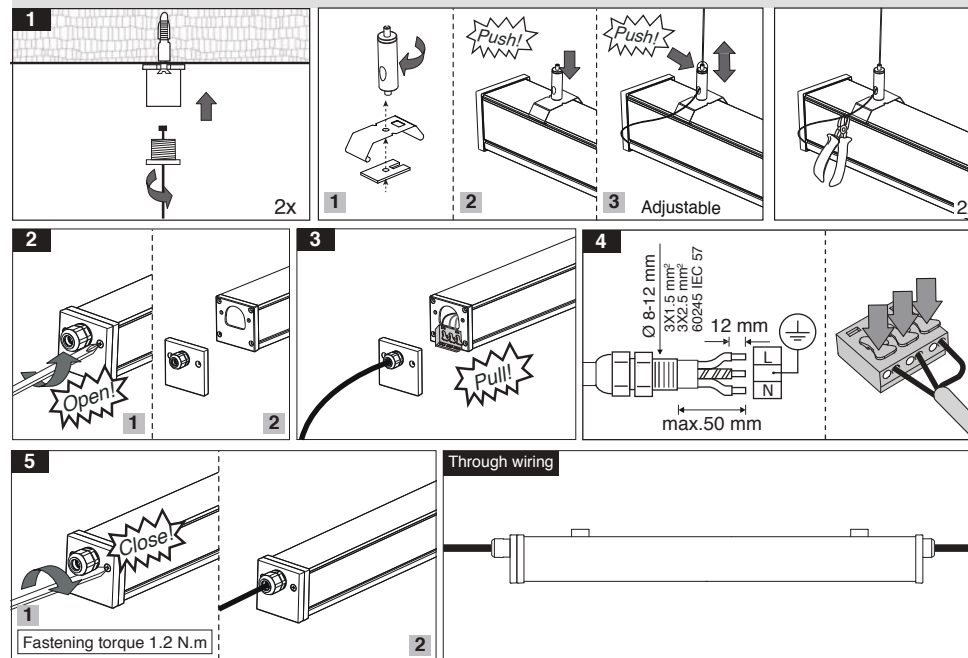

Electrical connection for battery-using luminaire

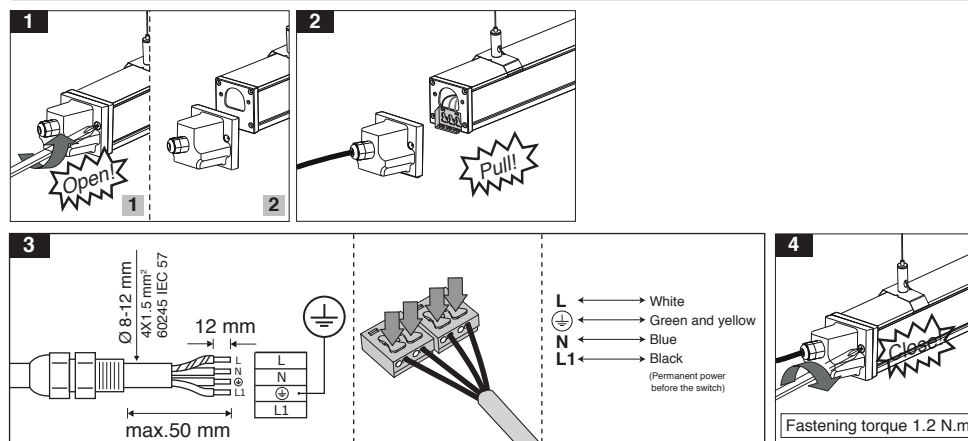

Through wiring

